

INDEX

Fixed LED Downlight



ALB1001
■ 15-16



ALB1003
■ 15-16



ALB1004
■ 15-16



ALB1008
■ 15-16



ALB1012
■ 15-16

Fixed LED Downlight



ALB1103
■ 17-18



ALB1104
■ 17-18



ALB1108
■ 17-18



ALB1115
■ 17-18

Fixed LED Downlight



ALB5501A/B/C
■ 19-20



ALB7501A/B/C
■ 19-20



ALB9501A/B/C
■ 19-20



ALB5503A/B/C
■ 19-20



ALB7503A/B/C
■ 19-20



ALB9503A/B/C
■ 19-20

Fixed LED Downlight



ALB7511A/B/C
■ 21-22



ALB7512A/B/C
■ 21-22



ALB7513A/B/C
■ 21-22



ALB7514A/B/C
■ 21-22

Fixed LED Downlight



ALB7502A/B/C
■ 23-24



ALB7504A/B/C
■ 23-24

INDEX

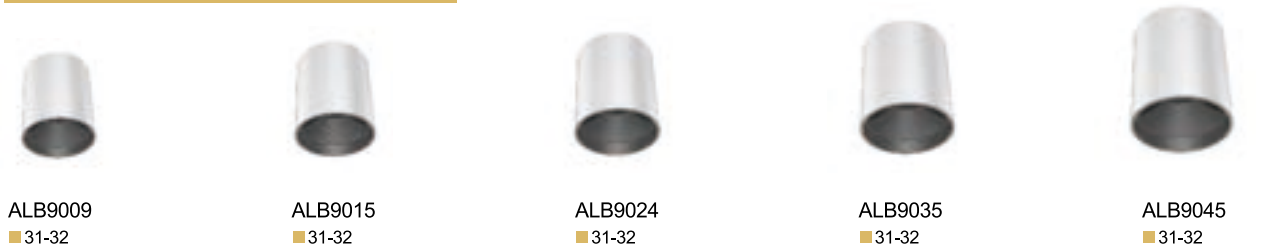
Fixed LED Downlight



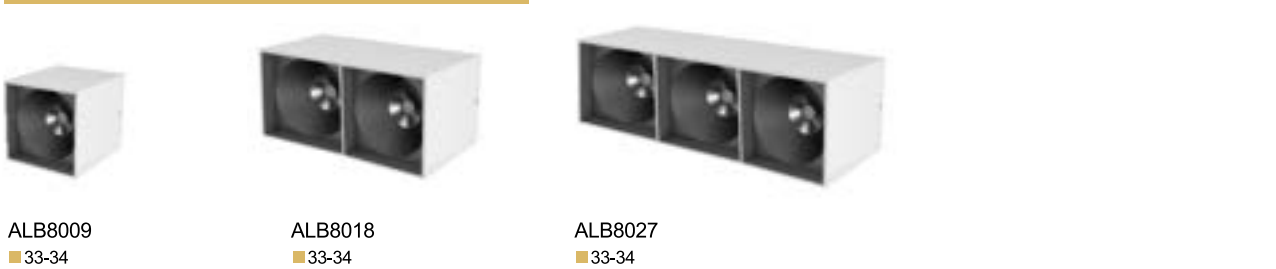
Fixed LED Downlight



Surface Mounted Donglight/Ceiling Light



Surface Square Mounted Donglight/Ceiling Light



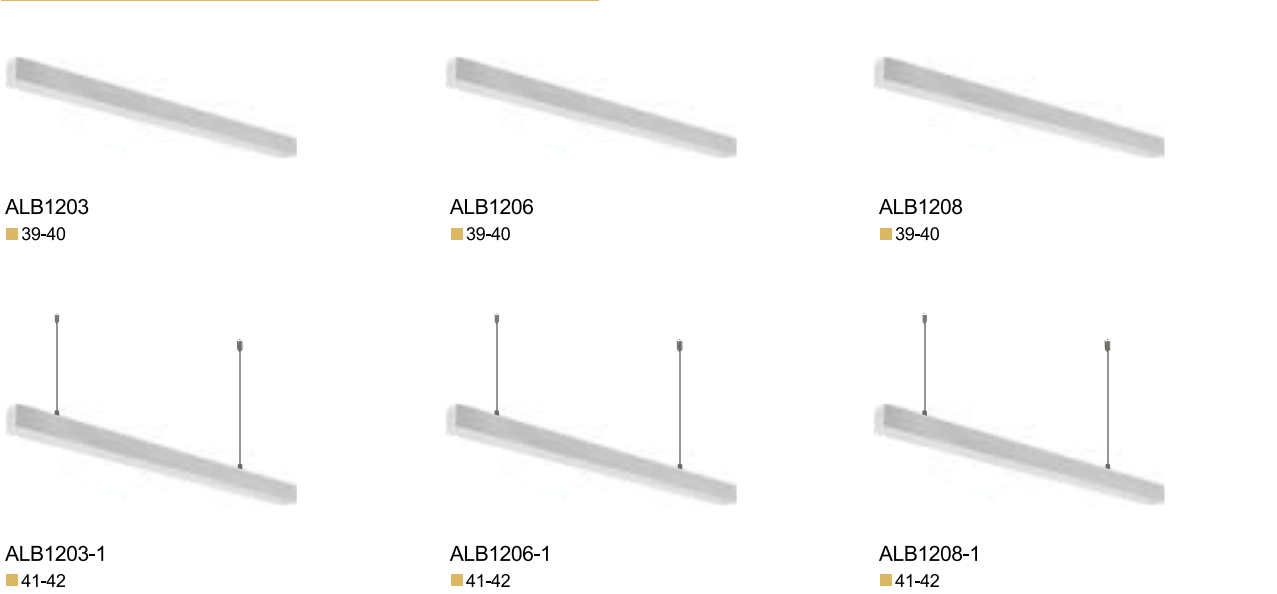
LED Recessed Linear Light



Surface-mounted Linear Lamp Series



LED Linear Light Series By Recessed/ Surface/Pendant



INDEX

Surface Mounted Ceiling Lamp Series



ALB2818
■ 43-44



ALB2830
■ 43-44



ALB3540
■ 43-44



ALB3550
■ 43-44

Full Plastic Ceiling Lamp



ALB1824S
■ 45-46



ALB1824S
■ 45-46



ALB1824S
■ 45-46



ALB1824S
■ 45-46

Surface Mounted Flat Panel Lamp



ALB3024
■ 47-48



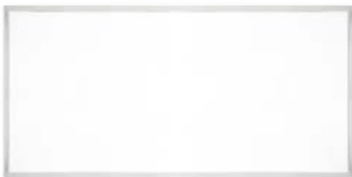
ALB6042
■ 47-48



ALB3036
■ 47-48



ALB3042
■ 47-48



ALB6058
■ 47-48

Recessed Flat Pane Light



ALB3024
■ 49-50



ALB6042
■ 49-50



ALB3036
■ 49-50



ALB3042
■ 49-50



ALB6058
■ 49-50

INDEX

Ceiling Light Series



ALB1012
■ 51-52



ALB1015
■ 51-52



ALB1112
■ 51-52



ALB1115
■ 51-52

Outdoor Ceiling Light



ALB1812
■ 53-54



ALB1820
■ 53-54



ALB1830
■ 53-54



ALB1812H
■ 53-54



ALB1820H
■ 53-54



ALB1830H
■ 53-54

Outdoor Wall Lighting Series



ALB108R
■ 55-56



ALB108S
■ 55-56



ALB901A
■ 57-58



ALB902A
■ 57-58

Tri-proof Light



ALB4520
■ 59-60



ALB4540
■ 59-60



ALB4555
■ 59-60

INDEX

UFO High Bay Light



ALB100D
■ 61-62



ALB150D
■ 61-62



ALB200D
■ 61-62



ALB100D
■ 61-62



ALB150D
■ 61-62



ALB200D
■ 61-62



Fixed LED Downlight



Fixed LED Downlight



CE

RoHS
compliant

SAA


ISO
9001

PHILIPS

OSRAM

IP20

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	IP	Code
 	1W	3V	300mA	≥90	3000K	15°	65lm/W	65lm	IP20	ALB1001
						27°	65lm/W	65lm	IP20	ALB1001
						60°	65lm/W	65lm	IP20	ALB1001
					4000K	15°	70lm/W	70lm	IP20	ALB1001
						27°	70lm/W	70lm	IP20	ALB1001
						60°	70lm/W	70lm	IP20	ALB1001
					5000K	15°	75lm/W	75lm	IP20	ALB1001
						27°	75lm/W	75lm	IP20	ALB1001
						60°	75lm/W	75lm	IP20	ALB1001
 	3W	3V	600mA	≥90	3000K	15°	65lm/W	195lm	IP20	ALB1003
						25°	65lm/W	195lm	IP20	ALB1003
						50°	65lm/W	195lm	IP20	ALB1003
					4000K	15°	70lm/W	210lm	IP20	ALB1003
						25°	70lm/W	210lm	IP20	ALB1003
						50°	70lm/W	210lm	IP20	ALB1003
					5000K	15°	75lm/W	225lm	IP20	ALB1003
						25°	75lm/W	225lm	IP20	ALB1003
						50°	75lm/W	225lm	IP20	ALB1003





	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	IP	Code
 	4W	3V	700mA	≥90	3000K	15°	65lm/W	350lm	IP20	ALB1004
						25°	65lm/W	350lm	IP20	ALB1004
						45°	65lm/W	350lm	IP20	ALB1004
					4000K	15°	70lm/W	350lm	IP20	ALB1004
						25°	70lm/W	350lm	IP20	ALB1004
						45°	70lm/W	350lm	IP20	ALB1004
					5000K	15°	75lm/W	350lm	IP20	ALB1004
						25°	75lm/W	350lm	IP20	ALB1004
						45°	75lm/W	350lm	IP20	ALB1004
 	8W	36V	200mA	≥90	3000K	20°	70lm/W	560lm	IP20	ALB1008
						40°	70lm/W	560lm	IP20	ALB1008
							70lm/W	560lm	IP20	ALB1008
					4000K	20°	70lm/W	560lm	IP20	ALB1008
						40°	70lm/W	560lm	IP20	ALB1008
							70lm/W	560lm	IP20	ALB1008
					5000K	20°	70lm/W	560lm	IP20	ALB1008
						40°	70lm/W	560lm	IP20	ALB1008
							70lm/W	560lm	IP20	ALB1008
 	12W	36V	300mA	≥90	3000K	15°	70lm/W	840lm	IP20	ALB1012
						24°	70lm/W	840lm	IP20	ALB1012
						36°	70lm/W	840lm	IP20	ALB1012
					4000K	15°	70lm/W	840lm	IP20	ALB1012
						24°	70lm/W	840lm	IP20	ALB1012
						36°	70lm/W	840lm	IP20	ALB1012
					5000K	15°	70lm/W	840lm	IP20	ALB1012
						24°	70lm/W	840lm	IP20	ALB1012
						36°	70lm/W	840lm	IP20	ALB1012

Fixed LED Downlight










IP20






	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
  Ø 35	3W	3V	300mA	≥90	3000K	24°	60lm/W	180lm	ALB1103
					4000K	24°	60lm/W	180lm	ALB1103
					5000K	24°	60lm/W	180lm	ALB1103
  Ø 50	4W	3V	600mA	≥90	3000K	24°	60lm/W	240lm	ALB1104
					4000K	24°	60lm/W	240lm	ALB1104
					5000K	24°	60lm/W	240lm	ALB1104
  Ø 55	8W	36V	200mA	≥90	3000K	24°	60lm/W	420lm	ALB1108
					4000K	24°	60lm/W	420lm	ALB1108
					5000K	24°	60lm/W	420lm	ALB1108
  Ø 75	15W	36V	350mA	≥90	3000K	24°	60lm/W	900lm	ALB1115
					4000K	24°	60lm/W	900lm	ALB1115
					5000K	24°	60lm/W	900lm	ALB1115



Adjustable LED Downlight

Adjustable



Model No.	ALB5501A/B/C	ALB7501A/B/C	ALB9501A/B/C
Product Photo			
Dimension(mm)			
Cutout(mm)			
Wattage	8W	12W	24W
CCT	3000K/ 4000K/ 5000K	3000K/ 4000K/ 5000K	3000K/ 4000K/ 5000K
CRI	≥90	≥90	≥90
Beam Angle	15° 24° 36°	15° 24° 36°	15° 24° 36°
Light Effect	90lm/W	90lm/W	90lm/W
Luminous Flux	720lm/W	1080lm/W	2160lm/W
IP	IP 20	IP 20	IP 20
Dimming			
Accessory			
Trimless Version	Not Available		
Reflector Color			






ALB5503A/B/C	ALB7503A/B/C	ALB9503A/B/C
		
		
		
8W	12W	24W
3000K/ 4000K/ 5000K	3000K/ 4000K/ 5000K	3000K/ 4000K/ 5000K
≥90	≥90	≥90
15° 24° 36°	15° 24° 36°	15° 24° 36°
90lm/W	90lm/W	90lm/W
720lm/W	1080lm/W	2160lm/W
IP 20	IP 20	IP 20
		
Not Available		
		



Adjustable LED Downlight




Adjustable

Model No.	ALB7511A/B/C	ALB7512A/B/C	
Product Photo			
Dimension(mm)			
Cutout(mm)			
Wattage	8W	12W	
CCT	3000K/ 4000K/ 5000K	3000K/ 4000K/ 5000K	
CRI	≥90	≥90	
Beam Angle	15° 24° 36°	15° 24° 36°	
Light Effect	90lm/W	90lm/W	
Luminous Flux	720lm/W	1080lm/W	
IP	IP 20	IP 20	
Dimming			
Accessory			
Trimless Version	Not Available		
Reflector Color			

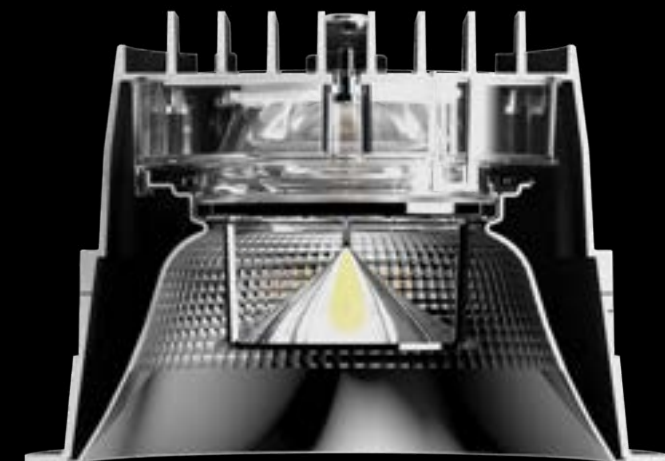
ALB7513A/B/C	ALB7514A/B/C	
		
		
		
8W	12W	
3000K/ 4000K/ 5000K	3000K/ 4000K/ 5000K	
≥90	≥90	
15° 24° 36°	15° 24° 36°	
90lm/W	90lm/W	
720lm/W	1080lm/W	
IP 20	IP 20	
		
Not Available		
		

Adjustable LED Downlight

Adjustable






Model No.	ALB7502A/B/C		ALB7504A/B/C	
Product Photo				
Dimension(mm)				
Cutout(mm)				
Wattage	12W		12W	
CCT	3000K/ 4000K/ 5000K		3000K/ 4000K/ 5000K	
CRI	≥90		≥90	
Beam Angle	15° 24° 36°		15° 24° 36°	
Light Effect	90lm/W		90lm/W	
Luminous Flux	1080lm/W		1080lm/W	
IP	IP 20		IP 20	
Dimming	NO			
Accessory				
Trimless Version	Not Available			
Reflector Color				





Adjustable LED Downlight

Adjustable

Model No.	ALB9009	ALB9015	ALB9024	ALB9035		ALB9045	
Product Photo							
Dimension(mm)							
Cutout(mm)							
Wattage	9W	15W	24W			35W	45W
CCT	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K			3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K
CRI	≥90	≥90	≥90			≥90	≥90
Beam Angle	60°	60°	60°			60°	60°
Light Effect	80lm/W	80lm/W	80lm/W			80lm/W	80lm/W
Luminous Flux	720lm/W	1200lm/W	1920lm/W			2800lm/W	3600lm/W
IP	IP 20	IP 20	IP 20			IP 20	IP 20
Dimming							
Accessory							
Trimless Version	Not Available					Not Available	
Reflector Color							

Fixed LED Downlight

CE

RoHS
compliant

SAA

ISO
9001
SGS

PHILIPS

OSRAM







IP40

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
	12W	30V	350mA	≥90	3000K	100°	100lm/W	1200lm	ALB9212
					4000K	100°	100lm/W	1200lm	ALB9212
					6000K	100°	100lm/W	1200lm	ALB9212
	20W	36V	500mA	≥90	3000K	100°	100lm/W	2000lm	ALB9220
					4000K	100°	100lm/W	2000lm	ALB9220
					6000K	100°	100lm/W	2000lm	ALB9220
	30W	39V	700mA	≥90	3000K	100°	100lm/W	3000lm	ALB9230
					4000K	100°	100lm/W	3000lm	ALB9230
					6000K	100°	100lm/W	3000lm	ALB9230

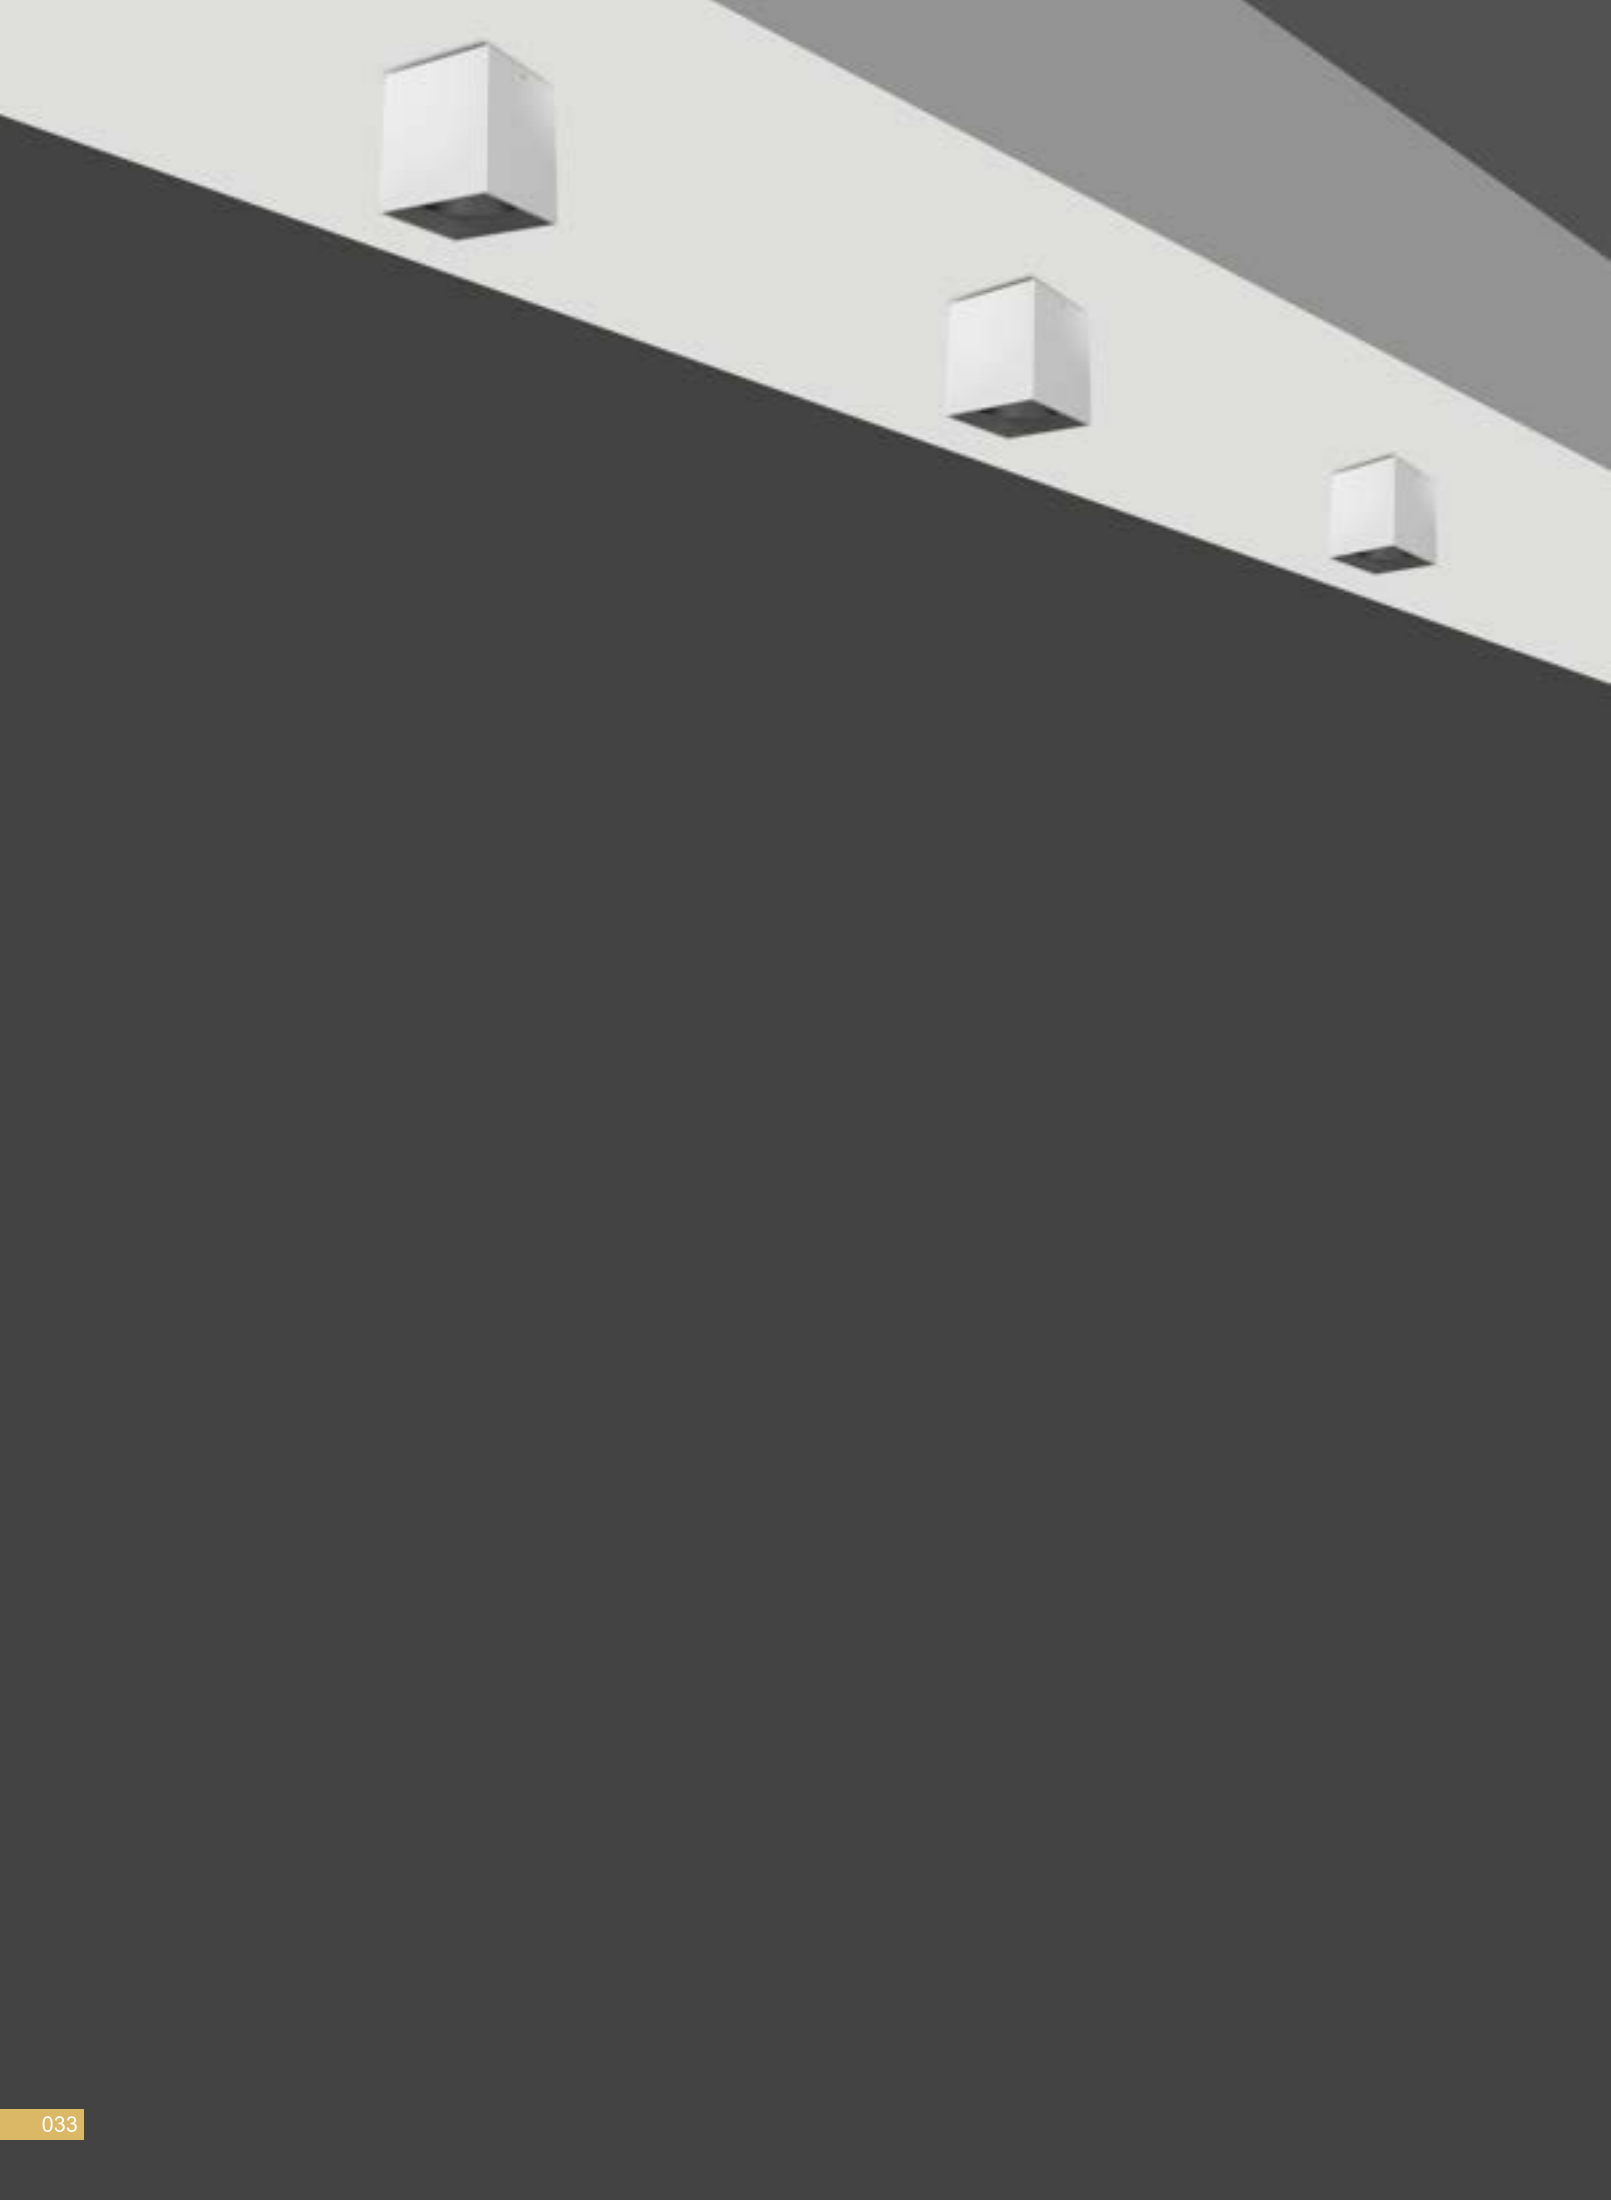


Surface Mounted Donglight/Ceiling Light

Adjustable

Model No.	ALB9009	ALB9015	ALB9024	ALB9035	ALB9045
Product Photo					
Dimension(mm)					
Cutout(mm)					
Wattage	9W	15W	24W	35W	45W
CCT	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K
CRI	≥90	≥90	≥90	≥90	≥90
Beam Angle	24° 60°	24° 60°	24° 60°	24° 60°	24° 60°
Light Effect	80lm/W	80lm/W	80lm/W	80lm/W	80lm/W
Luminous Flux	720lm/W	1200lm/W	1920lm/W	2800lm/W	3600lm/W
IP	IP 20	IP 20	IP 20	IP 20	IP 20
Dimming					
Accessory					
Trimless Version	Not Available				
Reflector Color					
					





Surface Square Mounted Donglight/Ceiling Light

CE

RoHS
compliant

SAA

ISO
9001
500

PHILIPS

OSRAM


IP44

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
	9W	27V	300mA	≥90	3000K	24°	80lm/W	720lm	ALB8009
						38°	80lm/W	720lm	ALB8009
						50°	80lm/W	720lm	ALB8009
					4000K	24°	80lm/W	720lm	ALB8009
						38°	80lm/W	720lm	ALB8009
						50°	80lm/W	720lm	ALB8009
					5000K	24°	80lm/W	720lm	ALB8009
						38°	80lm/W	720lm	ALB8009
						50°	80lm/W	720lm	ALB8009
					3000K	24°	80lm/W	1440lm	ALB8018
						38°	80lm/W	1440lm	ALB8018
						50°	80lm/W	1440lm	ALB8018
	18W	36V	500mA	≥90	3000K	24°	80lm/W	1440lm	ALB8018
						38°	80lm/W	1440lm	ALB8018
						50°	80lm/W	1440lm	ALB8018
					4000K	24°	80lm/W	1440lm	ALB8018
						38°	80lm/W	1440lm	ALB8018
						50°	80lm/W	1440lm	ALB8018
					5000K	24°	80lm/W	1440lm	ALB8018
						38°	80lm/W	1440lm	ALB8018
						50°	80lm/W	1440lm	ALB8018
					3000K	24°	80lm/W	2160lm	ALB8027
						38°	80lm/W	2160lm	ALB8027
						50°	80lm/W	2160lm	ALB8027
	27W	39V	700mA	≥90	3000K	24°	80lm/W	2160lm	ALB8027
						38°	80lm/W	2160lm	ALB8027
						50°	80lm/W	2160lm	ALB8027
					4000K	24°	80lm/W	2160lm	ALB8027
						38°	80lm/W	2160lm	ALB8027
						50°	80lm/W	2160lm	ALB8027
					5000K	24°	80lm/W	2160lm	ALB8027
						38°	80lm/W	2160lm	ALB8027
						50°	80lm/W	2160lm	ALB8027
					3000K	24°	80lm/W	2160lm	ALB8027
						38°	80lm/W	2160lm	ALB8027
						50°	80lm/W	2160lm	ALB8027


LED Recessed Linear Light




IP20

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
 	3x1W	3V	300mA	≥90	3000K	24°	80lm/W	240lm	ALB5603
					4000K	24°	80lm/W	240lm	ALB5603
					5000K	24°	80lm/W	240lm	ALB5603


	6x1W	36V	180mA	≥90	3000K	24°	80lm/W	480lm	ALB5606
					4000K	24°	80lm/W	480lm	ALB5606
					5000K	24°	80lm/W	480lm	ALB5606





	12x1W	36V	300mA	≥90	3000K	24°	80lm/W	960lm	ALB5612
					4000K	24°	80lm/W	960lm	ALB5612
					5000K	24°	80lm/W	960lm	ALB5612
									

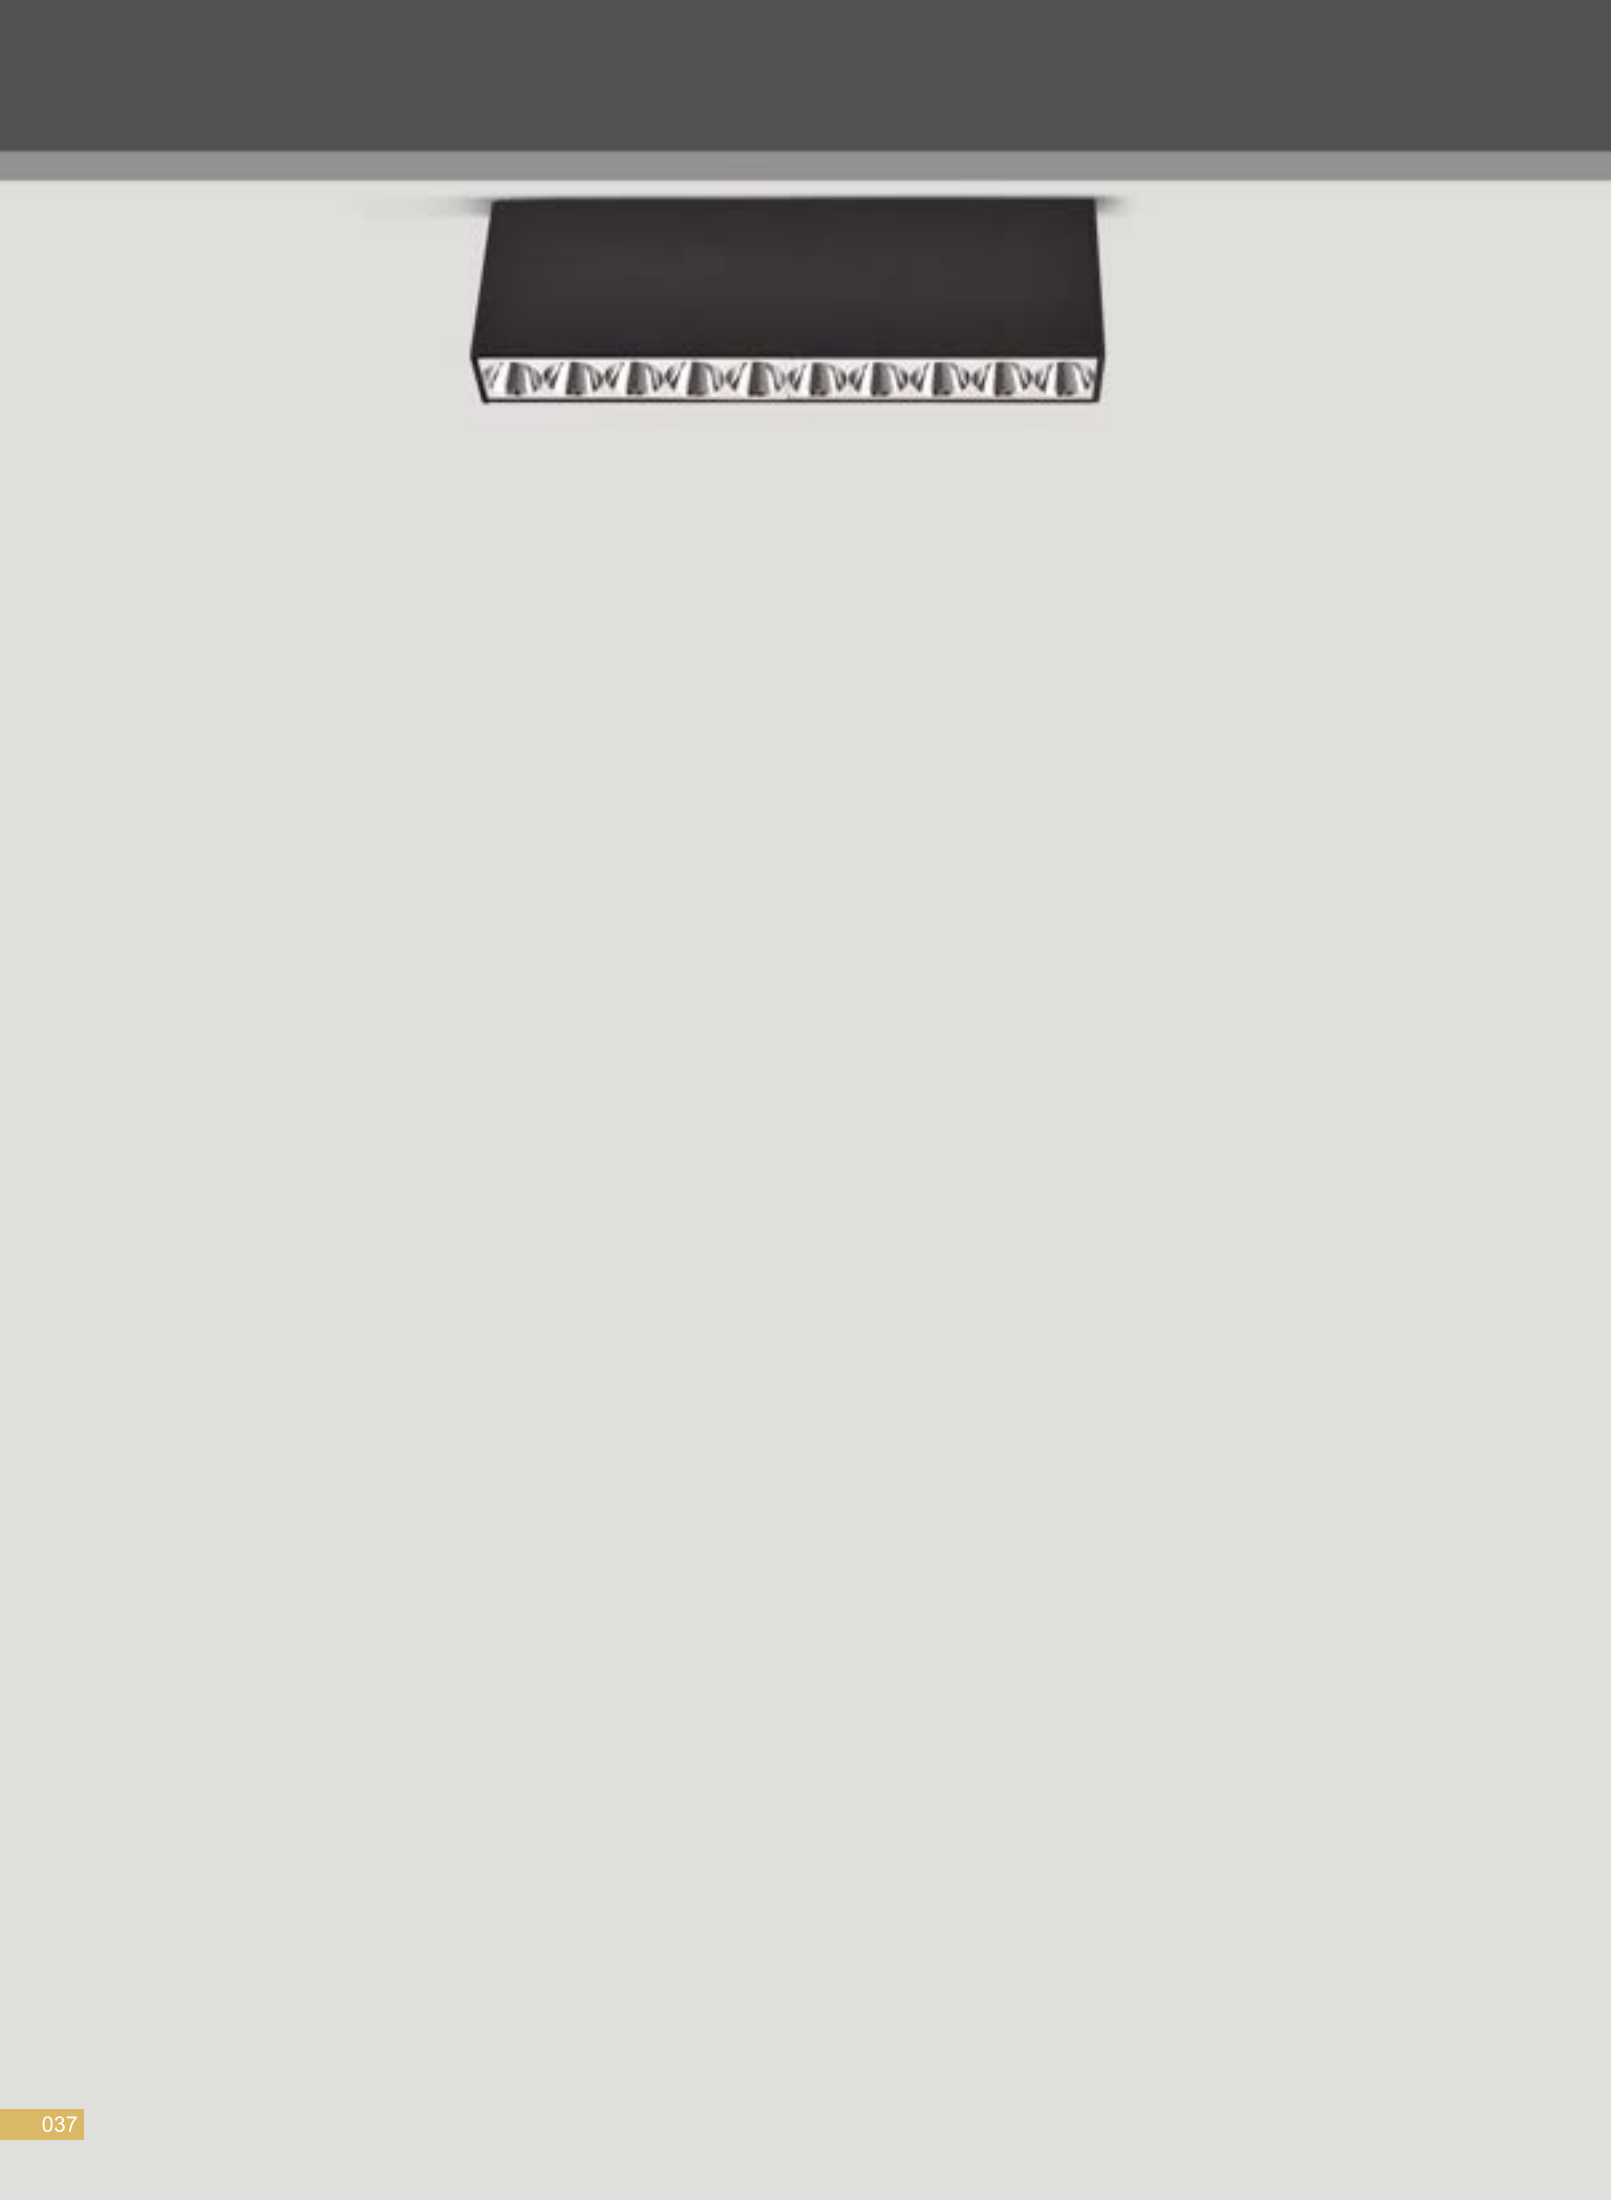


IP20

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
 	5x2W	30V	300mA	≥90	3000K	24° 36°	80lm/W 80lm/W	800lm 800lm	ALB5710 ALB5710
					4000K	24° 36°	80lm/W 80lm/W	800lm 800lm	ALB5710 ALB5710
					5000K	24° 36°	80lm/W 80lm/W	800lm 800lm	ALB5710 ALB5710

 	10x2W	30V	600mA	≥90	3000K	24° 36°	80lm/W 80lm/W	1600lm 1600lm	ALB5720 ALB5720
					4000K	24° 36°	80lm/W 80lm/W	1600lm 1600lm	ALB5720 ALB5720
					5000K	24° 36°	80lm/W 80lm/W	1600lm 1600lm	ALB5720 ALB5720

		15x2W	30V	900mA	≥90	3000K	24° 36°	80lm/W 80lm/W	2400lm 2400lm	ALB5730 ALB5730	
							4000K	24° 36°	80lm/W 80lm/W	2400lm 2400lm	ALB5730 ALB5730
							5000K	24° 36°	80lm/W 80lm/W	2400lm 2400lm	ALB5730 ALB5730



Surface-mounted Linear Lamp Series

CE

RoHS
compliant

SAA

ISO
9001
5000


PHILIPS

OSRAM

IP20

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
 140 37	5x2W	30V	300mA	≥90	3000K	15°	80lm/W	800lm	ALB8210
						30°	80lm/W	800lm	ALB8210
						45°	80lm/W	800lm	ALB8210
					4000K	15°	80lm/W	800lm	ALB8210
						30°	80lm/W	800lm	ALB8210
						45°	80lm/W	800lm	ALB8210
					5000K	15°	80lm/W	800lm	ALB8210
						30°	80lm/W	800lm	ALB8210
						45°	80lm/W	800lm	ALB8210
 272 37	10x2W	30V	600mA	≥90	3000K	15°	80lm/W	1600lm	ALB8220
						30°	80lm/W	1600lm	ALB8220
						45°	80lm/W	1600lm	ALB8220
					4000K	15°	80lm/W	1600lm	ALB8220
						30°	80lm/W	1600lm	ALB8220
						45°	80lm/W	1600lm	ALB8220
					5000K	15°	80lm/W	1600lm	ALB8220
						30°	80lm/W	1600lm	ALB8220
						45°	80lm/W	1600lm	ALB8220
 405 37	15x2W	30V	900mA	≥90	3000K	15°	80lm/W	2400lm	ALB8230
						30°	80lm/W	2400lm	ALB8230
						45°	80lm/W	2400lm	ALB8230
					4000K	15°	80lm/W	2400lm	ALB8230
						30°	80lm/W	2400lm	ALB8230
						45°	80lm/W	2400lm	ALB8230
					5000K	15°	80lm/W	2400lm	ALB8230
						30°	80lm/W	2400lm	ALB8230
						45°	80lm/W	2400lm	ALB8230


Adaptable linear fixture with advanced features




L Shaped



T Shaped

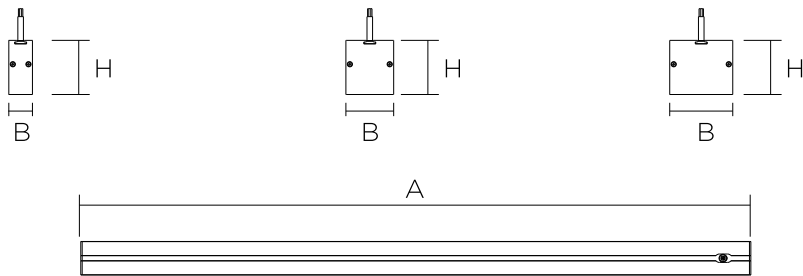


Y Shaped

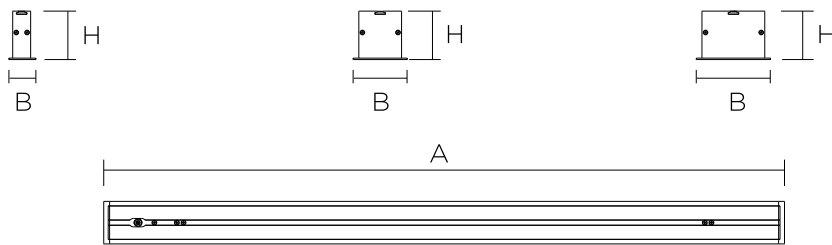


X Shaped

• Pendant





• Recessed




LED Linear Light Series By Recessed/ Surface/Pendant



	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
 	18W	36V	600mA	≥80	3000K	120°	80lm/W	1440lm	ALB1203
					4000K	120°	80lm/W	1440lm	ALB1203
					5700K	120°	80lm/W	1440lm	ALB1203

 	30W	36V	900mA	≥80	3000K	120°	80lm/W	2400lm	ALB1206
					4000K	120°	80lm/W	2400lm	ALB1206
					5700K	120°	80lm/W	2400lm	ALB1206

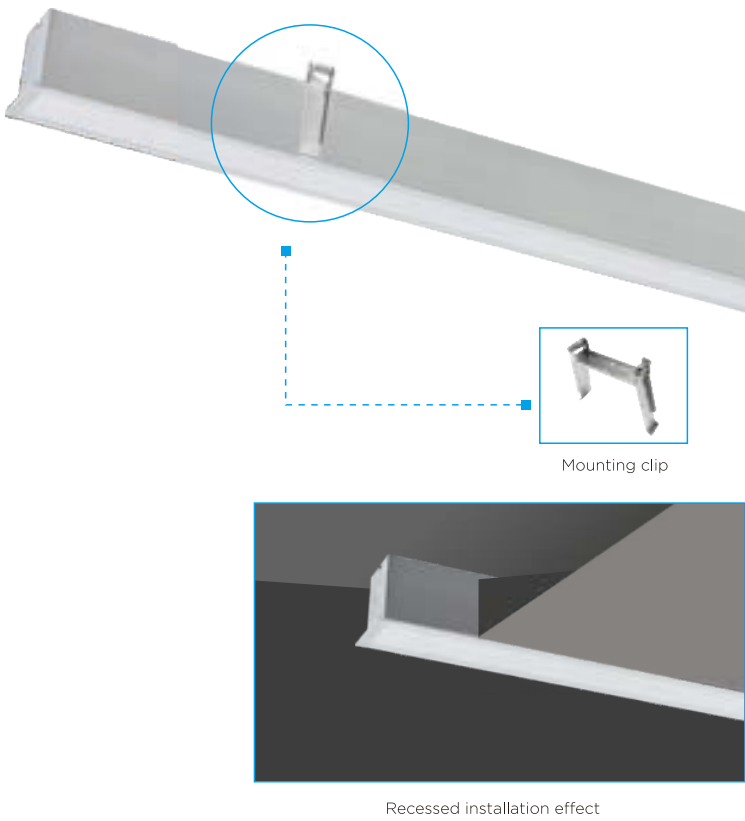
 	30W	36V	1050mA	≥80	3000K	120°	80lm/W	2400lm	ALB1208
					4000K	120°	80lm/W	2400lm	ALB1208
					5700K	120°	80lm/W	2400lm	ALB1208

Mounting options

Pendant



Recessed



LED Linear Light Series By Recessed/ Surface/Pendant

CE

RoHS
compliant




SAA

ISO
9001
500

PHILIPS

OSRAM

IP20

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
 	18W	36V	600mA	≥80	3000K	120°	80lm/W	1440lm	ALB1203
					4000K	120°	80lm/W	1440lm	ALB1203
					5700K	120°	80lm/W	1440lm	ALB1203
 	30W	36V	900mA	≥80	3000K	120°	80lm/W	2400lm	ALB1206
					4000K	120°	80lm/W	2400lm	ALB1206
					5700K	120°	80lm/W	2400lm	ALB1206
 	30W	36V	1050mA	≥80	3000K	120°	80lm/W	2400lm	ALB1208
					4000K	120°	80lm/W	2400lm	ALB1208
					5700K	120°	80lm/W	2400lm	ALB1208



Surface Mounted Ceiling Lamp Series

CE

RoHS
compliant





SAA

ISO
9001
505

PHILIPS

OSRAM

IP44

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
 	18W	36V	450mA	≥90	3000K	170°	100lm/W	1800lm	ALB2818
					4000K	170°	100lm/W	1800lm	ALB2818
					6000K	170°	100lm/W	1800lm	ALB2818
 	30W	36V	750mA	≥90	3000K	170°	100lm/W	3000lm	ALB2830
					4000K	170°	100lm/W	3000lm	ALB2830
					6000K	170°	100lm/W	3000lm	ALB2830
 	40W	36V	1000mA	≥90	3000K	170°	100lm/W	3000lm	ALB3540
					4000K	170°	100lm/W	3000lm	ALB3540
					6000K	170°	100lm/W	3000lm	ALB3540
 	50W	36V	1200mA	≥90	3000K	170°	100lm/W	3000lm	ALB3550
					4000K	170°	100lm/W	3000lm	ALB3550
					6000K	170°	100lm/W	3000lm	ALB3550



Surface-mounted Linear Lamp Series

CE

RoHS
compliant

SAA

ISO
9001
SGS

PHILIPS

OSRAM

IP44

LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
18W	36V	500mA	≥80	3000K	170°	90lm/W	1620lm	ALB1824S
				4000K	170°	90lm/W	1620lm	ALB1824S
				6500K	170°	90lm/W	1620lm	ALB1824S

LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
24W	36V	700mA	≥80	3000K	170°	90lm/W	2160lm	ALB1824S
				4000K	170°	90lm/W	2160lm	ALB1824S
				6500K	170°	90lm/W	2160lm	ALB1824S





Surface Mounted Flat Panel Lamp

CE

RoHS
compliant


SAA


ISO
9001
500


PHILIPS


OSRAM

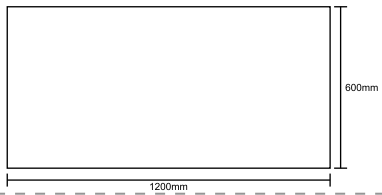
IP20

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
 	24W	36V	600mA	≥80	3000K	170°	100lm/W	2400lm	ALB3024
					4000K	170°	100lm/W	2400lm	ALB3024
					6000K	170°	100lm/W	2400lm	ALB3024

 	36W	36V	900mA	≥80	3000K	170°	100lm/W	3600lm	ALB3036
					4000K	170°	100lm/W	3600lm	ALB3036
					6000K	170°	100lm/W	3600lm	ALB3036

 	42W	36V	1050mA	≥80	3000K	170°	100lm/W	4200lm	ALB3042
					4000K	170°	100lm/W	4200lm	ALB3042
					6000K	170°	100lm/W	4200lm	ALB3042

 	42W	36V	1050mA	≥80	3000K	170°	100lm/W	4200lm	ALB6042
					4000K	170°	100lm/W	4200lm	ALB6042
					6000K	170°	100lm/W	4200lm	ALB6042

 	58W	36V	1400mA	≥80	3000K	170°	100lm/W	5800lm	ALB6058
					4000K	170°	100lm/W	5800lm	ALB6058
					6000K	170°	100lm/W	5800lm	ALB6058



Recessed Flat Pane Light

CE

RoHS
compliant





SAA

ISO
9001
500

PHILIPS

OSRAM

IP20

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
 	24W	36V	600mA	≥80	3000K	170°	100lm/W	2400lm	ALB3024
					4000K	170°	100lm/W	2400lm	ALB3024
					6000K	170°	100lm/W	2400lm	ALB3024
 	36W	36V	900mA	≥80	3000K	170°	100lm/W	3600lm	ALB3036
					4000K	170°	100lm/W	3600lm	ALB3036
					6000K	170°	100lm/W	3600lm	ALB3036
 	42W	36V	1050mA	≥80	3000K	170°	100lm/W	4200lm	ALB3042
					4000K	170°	100lm/W	4200lm	ALB3042
					6000K	170°	100lm/W	4200lm	ALB3042
 	42W	36V	1050mA	≥80	3000K	170°	100lm/W	4200lm	ALB6042
					4000K	170°	100lm/W	4200lm	ALB6042
					6000K	170°	100lm/W	4200lm	ALB6042
 	58W	36V	1400mA	≥80	3000K	170°	100lm/W	5800lm	ALB6058
					4000K	170°	100lm/W	5800lm	ALB6058
					6000K	170°	100lm/W	5800lm	ALB6058



Ceiling Light Series

CE

RoHS
compliant



SAA

ISO
9001
SGS

PHILIPS

OSRAM

IP54

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
	12W	36V	300mA	≥80	3000K	110°	80lm/W	960lm	ALB1012
					4000K	110°	80lm/W	960lm	ALB1012
					6000K	110°	80lm/W	960lm	ALB1012
									
	15W	36V	350mA	≥80	3000K	110°	80lm/W	1200lm	ALB1015
					4000K	110°	80lm/W	1200lm	ALB1015
					6000K	110°	80lm/W	1200lm	ALB1015
									

Ceiling Light Series

CE

RoHS
compliant



SAA

ISO
9001
SGS

PHILIPS

OSRAM

IP54

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
	12W	36V	300mA	≥80	3000K	110°	80lm/W	860lm	ALB1112
					4000K	110°	80lm/W	860lm	ALB1112
					6000K	110°	80lm/W	860lm	ALB1112
									
	15W	36V	350mA	≥80	3000K	110°	80lm/W	1000lm	ALB1115
					4000K	110°	80lm/W	1000lm	ALB1115
					6000K	110°	80lm/W	1000lm	ALB1115
									



Outdoor Ceiling Light

CE

RoHS
compliant


SAA


ISO
9001
505


PHILIPS

OSRAM

IP54

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
	12W	30V	350mA	≥80	3000K	110°	80lm/W	960lm	ALB1812
					4000K	110°	80lm/W	960lm	ALB1812
					6000K	110°	80lm/W	960lm	ALB1812
									

	20W	36V	500mA	≥80	3000K	110°	80lm/W	1600lm	ALB1820
					4000K	110°	80lm/W	1600lm	ALB1820
					6000K	110°	80lm/W	1600lm	ALB1820
									

	30W	39V	700mA	≥80	3000K	110°	80lm/W	2400lm	ALB1830
					4000K	110°	80lm/W	2400lm	ALB1830
					6000K	110°	80lm/W	2400lm	ALB1830
									



ALB1812H



ALB1820H



ALB1830H



Outdoor Wall Lighting Series

CE

RoHS
compliant

SAA

ISO
9001
505

PHILIPS

OSRAM

IP65

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
	8W	36V	150mA	≥80	3000K		55lm/W	440lm	ALB108R
					4000K		55lm/W	440lm	ALB108R
					6000K		55lm/W	440lm	ALB108R
	8W	36V	150mA	≥80	3000K		55lm/W	440lm	ALB108S
					4000K		55lm/W	440lm	ALB108S
					6000K		55lm/W	440lm	ALB108S



Outdoor Wall Lighting Series

CE

RoHS
compliant

SAA

ISO
9001
SOS

PHILIPS

OSRAM

IP44

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
	5W	36V	150mA	≥80	3000K		55lm/W	275lm	ALB901A
					4000K		55lm/W	275lm	ALB901A
					6000K		55lm/W	275lm	ALB901A

	10W	36V	250mA	≥80	3000K		55lm/W	550lm	ALB902A
					4000K		55lm/W	550lm	ALB902A
					6000K		55lm/W	550lm	ALB902A



Tri-proof Light

CE

RoHS
compliant


SAA


ISO
9001
SGS


PHILIPS


OSRAM

IP54

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
 	20W	36V	500mA	≥80	3000K	110°	80lm/W	1600lm	ALB4520
					4000K	110°	80lm/W	1600lm	ALB4520
					6000K	110°	80lm/W	1600lm	ALB4520

 	40W	36V	1050mA	≥80	3000K	110°	80lm/W	3200lm	ALB4540
					4000K	110°	80lm/W	3200lm	ALB4540
					6000K	110°	80lm/W	3200lm	ALB4540

 	55W	36V	1400mA	≥80	3000K	110°	80lm/W	4400lm	ALB4555
					4000K	110°	80lm/W	4400lm	ALB4555
					6000K	110°	80lm/W	4400lm	ALB4555


PC clip


S/S clip


Installation component


IP65


FV-2


IK08


5 year warranty


Emergency


Microwave


120° Beam angle


50,000 L80B10

Outdoor ALBFO Hight Bay Light

CE

RoHS
compliant

SAA

ISO
9001
✓
SGS

PHILIPS

OSRAM

IP65

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
	100W			≥80	3000K	90°	90lm/W	9000lm	ALB100D
					4000K	90°	90lm/W	9000lm	ALB100D
					6000K	90°	90lm/W	9000lm	ALB100D
	150W			≥80	3000K	90°	90lm/W	13500lm	ALB150D
					4000K	90°	90lm/W	13500lm	ALB150D
					6000K	90°	90lm/W	13500lm	ALB150D
	200W			≥80	3000K	90°	90lm/W	18000lm	ALB200D
					4000K	90°	90lm/W	18000lm	ALB200D
					6000K	90°	90lm/W	18000lm	ALB200D

Outdoor ALBFO Hight Bay Light

CE

RoHS
compliant

SAA

ISO
9001
✓
SGS

PHILIPS

OSRAM

IP65

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
	100W			≥80	3000K	90°	90lm/W	9000lm	ALB100D
					4000K	90°	90lm/W	9000lm	ALB100D
					6000K	90°	90lm/W	9000lm	ALB100D
	150W			≥80	3000K	90°	90lm/W	13500lm	ALB150D
					4000K	90°	90lm/W	13500lm	ALB150D
					6000K	90°	90lm/W	13500lm	ALB150D
	200W			≥80	3000K	90°	90lm/W	18000lm	ALB200D
					4000K	90°	90lm/W	18000lm	ALB200D
					6000K	90°	90lm/W	18000lm	ALB200D



Outdoor Spotlight

CE

RoHS
compliant



SAA

ISO
9001
500

PHILIPS

OSRAM

IP65

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
 	10W	36V	250mA	≥80	3000K	15°	90lm/W	900lm	ALB2010
						24°	90lm/W	900lm	ALB2010
						38°	90lm/W	900lm	ALB2010
					4000K	15°	90lm/W	900lm	ALB2010
						24°	90lm/W	900lm	ALB2010
						38°	90lm/W	900lm	ALB2010
					5000K	15°	90lm/W	900lm	ALB2010
						24°	90lm/W	900lm	ALB2010
						38°	90lm/W	900lm	ALB2010
 	20W	36V	500mA	≥80	3000K	15°	90lm/W	1800lm	ALB2020
						24°	90lm/W	1800lm	ALB2020
						38°	90lm/W	1800lm	ALB2020
					4000K	15°	90lm/W	1800lm	ALB2020
						24°	90lm/W	1800lm	ALB2020
						38°	90lm/W	1800lm	ALB2020
					5000K	15°	90lm/W	1800lm	ALB2020
						24°	90lm/W	1800lm	ALB2020
						38°	90lm/W	1800lm	ALB2020





Garden Lamp

CE

RoHS
compliant




SAA

ISO
9001
500

PHILIPS

OSRAM

IP65

	LED Power	LED Voltage	LED Current	CRI	CCT	Beam	Luminous Efficacy	Flux	Code
 	10W	36V	600mA	≥80	3000K	360°	60lm/W	600lm	ALB2010
					4000K	360°	60lm/W	600lm	ALB2010
					5000K	360°	60lm/W	600lm	ALB2010
 	10W	36V	600mA	≥80	3000K	360°	60lm/W	600lm	ALB2110
					4000K	360°	60lm/W	600lm	ALB2110
					5000K	360°	60lm/W	600lm	ALB2110
 	10W	36V	600mA	≥80	3000K	360°	60lm/W	600lm	ALB2110
					4000K	360°	60lm/W	600lm	ALB2110
					5000K	360°	60lm/W	600lm	ALB2110